

斜柄高鈷鑽頭

Taper Shank HSS Cobalt Drills


SUS

2T71



- ◎使用HSS-Co材質，具有耐高溫，耐磨耗之特性。
- ◎使用於耐熱鋼、不銹鋼、合金鋼及HRC 28以上之難切削材料。

直徑 D mm	全長 L mm	溝長 ℓ mm	MT.NO.
13.5	202	118	1
14.0	205	122	1
14.5	222	122	2
15.0	225	125	2
15.5	228	128	2
16.0	230	130	2
16.5	232	132	2
17.0	235	135	2
17.5	240	140	2
18.0	240	140	2
18.5	245	145	2
19.0	245	145	2

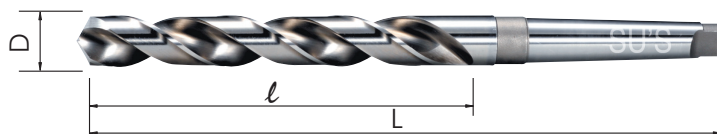

- ◎Basic on HSS-Co features heat and wear resistance.
- ◎Suitable for drilling tough materials, such as Heat-Resistant Steel, Stainless Steel, Alloy Steel and Steel with hardness over HRC 28.

直徑 D mm	全長 L mm	溝長 ℓ mm	MT.NO.
19.5	250	150	2
20.0	250	150	2
20.5	255	155	2
21.0	255	155	2
21.5	260	160	2
22.0	260	160	2
23.0	265	165	2
24.0	285	165	3
25.0	285	165	3
26.0	285	165	3
27.0	290	170	3
28.0	295	175	3

切削條件請參照P43~46
Cutting data P43~46

諾氏高鈷鑽頭

Noss HSS Cobalt Drills


2N71



- ◎適用HSS-Co材質，具有耐高溫，耐磨耗之特性。
- ◎適用於耐熱鋼、不銹鋼、合金鋼及HRC 28以上之難切削材料。

直徑 D mm	全長 L mm	溝長 ℓ mm	柄徑 ds mm
13.5	140	82	12.7
14.0			
14.5			
15.0			
15.5			
16.0			
16.5			
17.0			

直徑 D mm	全長 L mm	溝長 ℓ mm	柄徑 ds mm
17.5	140	82	12.7
18.0			
18.5			
19.0			
19.5			
20.0			
20.5			
21.0			

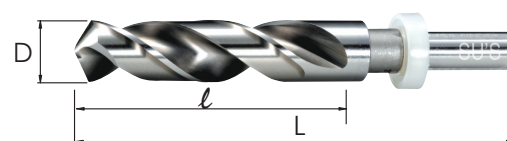

- ◎HSS-Co heat-resistance and wear-resistance.
- ◎Suitable for drilling tough materials, such as Heat-Resistant Steel, Stainless Steel, Alloy Steel and Steel with hardness over HRC 28.

直徑 D mm	全長 L mm	溝長 ℓ mm	柄徑 ds mm
21.5	140	82	12.7
22.0			
23.0			
24.0			
25.0			
26.0			

切削條件請參照P43~46
Cutting data P43~46